

M

M108S (REAR)

FEATURES




Auxiliary Control Valve

Two remote valves come standard on the M108S: a self-cancelling detent and a valve with a floating detent. The maximum installation is three valves (3rd flow control valve is available).



Independent PTO

The PTO clutch enables the implement drive system to engage smoothly, which helps reduce operator fatigue. And because the PTO is independent, you don't have to stop the tractor to engage or disengage the PTO, saving time no matter what the task.

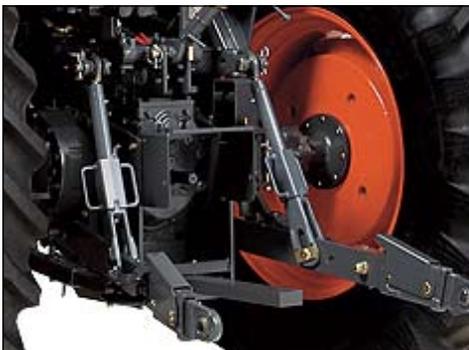

Floating Lift Rods

Floating lift rods are standard on the M108S. The floating position offer a smoother ride and enhanced traction while using the 3-point hitch, especially on uneven terrain.



Cat. II Hitch (Telescoping Links Standard)

The category II 3-point hitch provides fast and easy attachment of rear-mounted implements. The hitch's telescopic stabilizers and lower link ends make hook up and adjustments simple and worry-free.



Instrument Panel with LCD Readout

The new instrument panel makes viewing the vital functions of the tractor clear and easy. The LCD readout displays travel speed, PTO revolution and hour meter information digitally. Illuminated analog indicators include a large tachometer, temperature gauge and fuel gauge. A battery warning light has also been added to these tractors to prevent surprise battery failures, as well as indicator lights for 4WD engagement, PTO and oil pressure.

M

M108S (REAR)

Kubota

FEATURES



Easy Step Tilt Steering Wheel

Find the position most comfortable for you. Step on the pedal; tilt the wheel to select from among six wheel positions, and then lock it in place. Simply step on the pedal again to unlock the wheel for easy tractor mounting and dismounting.